
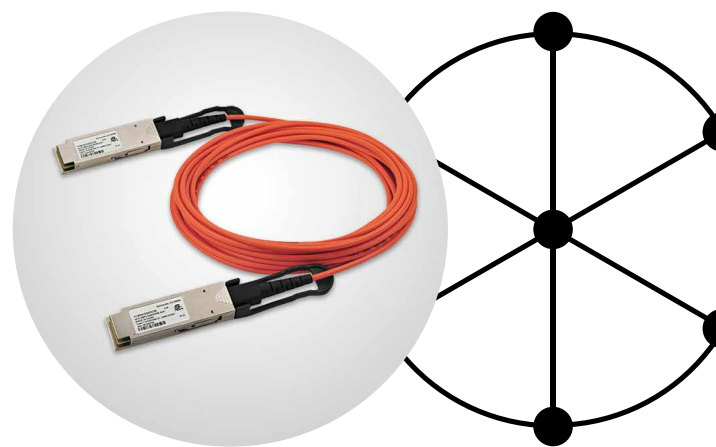


FINISAR[®] TRANSCEIVERS AND COMMUNICATION CABLES

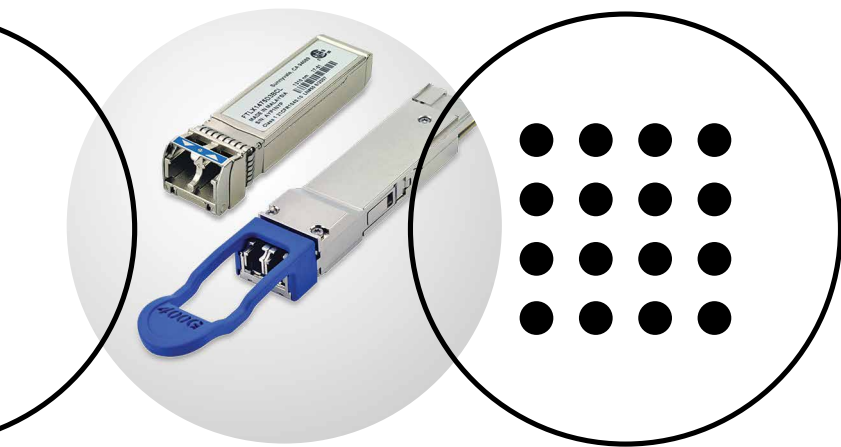

FINISAR® TRANSCEIVERS AND COMMUNICATION CABLES

SFP (copper and optical; longwave, shortwave and WDM)

Datacom applications using Fast Ethernet, Gigabit Ethernet, 1x/2x/4x Fibre Channel

Telecom applications using OC-3/STM-1, OC-12/STM-4, OC-48/STM-16, and Wireless/CPRI across all reaches

Features

- 3.3 V operating voltage
- Distances from very short links up to 90 km
- Wide operating temperature range
- Metal enclosure for lower EMI
- Digital diagnostics
- Wireless CPRI compliant



SFP+/SFP28/SFP56

(optical; longwave, shortwave, DWDM and tunable)

Datacom applications using 10G, 25G, and 50G Ethernet and 2x/4x/8x/10x/16x/32x/64x Fibre Channel (LW and SW)

Telecom applications using either OC-192/STM-64, 10G Ethernet, or Wireless/CPRI

Features

- 3.3 V operating voltage
- Supports bit rates up to 57.8 Gb/s (LW, SW), 28.05 Gb/s (DWDM) and 25.78Gb/s (Tunable)
- Distances from short links up to 80 km LW, SW, DWDM (tunable and fixed)
- Wide operating temperature range
- Digital diagnostics
- Wireless CPRI compliant (LW and SW)
- Bi-directional SFP+ transceiver available



CFP/CFP2/CFP4

(optical; longwave)

Datacom applications using 100G Ethernet

Telecom applications using OTU4

Features

- Hot-pluggable, MSA-compliant CFP, CFP2, and CFP4 form factors
- Supports 103.1 Gb/s to 112 Gb/s aggregate bit rates
- Maximum link length of 10 km on SMF
- 3.3 V operating voltage



QSFP+/QSFP28/QSFP56

(optical; longwave, shortwave, and DWDM)

Datacom applications using 40G, 100G, and 200G Ethernet and high-density 10G, 25G, and 50G Ethernet

Telecom applications using OTU3 and OTU4

Features

- Four-channel full duplex transceiver module
- Single-channel full duplex transceiver module (QSFP28 only)
- Hot-pluggable, MSA-compliant QSFP+, QSFP28 and QSFP56 form factors
- Maximum link length of 300 m on OM3 MMF, 400 m on OM4/OM5 MMF, and 40 km on SMF (QSFP+ only)
- 3.3 V operating voltage
- Digital diagnostics
- Wireless CPRI compliant (LW and SW)
- I-Temp variants available



QSFP-DD/OSFP

 (optical; longwave and shortwave)

Datacom applications using 200G, 400G, and 800G Ethernet and high-density 25G, 50G, and 100G Ethernet

Features

- Four- or eight-channel full duplex transceiver module
- Hot-pluggable, MSA-compliant form factor
- Maximum link length of 70 m on OM3 MMF, 100 m on OM4 MMF and 10 km on SMF
- 3.3 V operating voltage
- Digital diagnostics



CXP

 (optical; shortwave)

Datacom applications for high-bandwidth, chassis interconnections

Features

- Twelve-channel full-duplex transceiver module
- Hot Pluggable CXP form factor
- Maximum link length of 300 m on OM3 MMF and 400 m on OM4 MMF
- Multi-rate Capability: Supports 1 Gb/s to 16 Gb/s per channel




Optical Engines (optical; shortwave)

Datacom applications for inter-chassis connections

Features

- Twelve-channel full-duplex transceiver modules
- Maximum link length of 70 m at 25 Gb/s on OM4 MMF
- Multirate capability: supports 1 Gb/s up to 28.1 Gb/s per channel



Endurance Compact Transceivers

(optical; longwave and shortwave)

Features

- Compact form-factor for high-density solutions
- Data rate flexibility including 1G and 10G Ethernet, Fast Ethernet, and 1x/2x/4x/8x/16x Fibre Channel
- Board-mounted for an edge optical interface or internal mounting
- Designed for rugged applications



Coherent Transceivers (optical; longwave)

Telecom 100 Gb/s, 200 Gb/s, and 400 Gb/s applications

Features

- Digital Coherent Optics (with built-in Digital Signal Processor) and Analog Coherent Optics (paired with external DSP) modules
- Enables “pay-as-you-grow” deployment of coherent optics
- Supports multiple modulation formats, with aggregate data rates up to > 400 Gb/s



Communications Cables

SFPwire®

10G and 25G Active Optical Cables (AOC) and Direct Attach Cables (DAC) for Ethernet; AOCs available with Connectivity Diagnostics® visual fault alert

quodwire®

40G/100G/400G/800G Active Optical Cables (AOC) for Ethernet; 100G/400G Direct Attach Cables (DAC) for Ethernet; InfiniBand™ AOCs for QDR/FDR/EDR/HDR/NDR; AOCs for SAS3 and PCIe3; 40G and 56G AOCs available with Connectivity Diagnostics® visual fault alert



SFF (optical; longwave and shortwave)

Datacom applications using Gigabit Ethernet, 1x/2x/4x Fibre Channel

Telecom applications using OC-3/STM-1, and OC-48/STM-16 across all reaches

Features

- Distances from very short links up to 15 km
- Wide operating temperature range
- Available in 2x5, 2x7 or 2x10; 2x7 and 2x10 incorporate digital diagnostics



C.wire®

120G to 200G Active Optical Cables for Ethernet and InfiniBand 12xQDR

Digital Diagnostics

Our Finisar® transceivers feature a microprocessor and diagnostics interface that provide performance information on the data link. Users can remotely monitor—in real-time—received optical power, transmitted optical power, laser bias current, transceiver input voltage and transceiver temperature of any transceiver in the network. These patented digital diagnostic functions provide network managers with a highly accurate, cost-effective tool for implementing reliable performance monitoring.

